

A COMPACT PERFORMER THAT DELIVERS ON QUALITY AND PRODUCTIVITY

The imageRUNNER ADVANCE DX C359i Series is suited for businesses that need enterprise features and efficiencies in a space saving design.

Canon imageRUNNER ADVANCE DX C359i Series

Colour Multifunction Device



PERFORMANCE

Save time and resources with increased workflow productivity

- Intuitive, user-friendly interface with a large 10.1 inch WSVGA touchscreen and smartphone similarities.
- Advanced scanning technology can dramatically reduce time spent naming and saving scanned files to your cloud storage service*.
- Single-pass document feeder and automatic blank page removal for streamlined digital workflows.
- Hot Folders allow users to drag and drop a file into a Hot Folder and automatically print with pre-defined settings such as number of copies and finishing requirements.
- Scan and convert documents to searchable digital files in a variety of file formats.



COST CONTROL

Improving operation efficiencies and better managing costs

- Forced job hold with ability to change print settings at device enhances control over projects.
- Blank page removal eliminates paper wastage and helps with document formatting.
- Support for multiple user authentication methods and usage tracking.



INTEGRATION

Seamlessly integrate with key line-of-business systems to fast track your digital transformation journey

- Personalised workflows allow users to pick and choose what works best for them in terms of functionality.
- Canon's powerful Multifunctional Embedded Application Platform (MEAP), combined with a common source code for firmware, ensures that IT and office automation is smoothly aligned.
- Access and store your cloud documents at anytime using uniFLOW Online.



MOBILITY

Workers and contractors can achieve ultimate freedom and flexibility with Expanded Mobile OS Support

- Mobile workflows are fully supported with Apple® Airprint®, Android™ Mopria™ and Canon PRINT Business app for iOS/Android. Easily allow users to connect, print, scan and capture.
- Simple and easy connectivity with multiple connection options, USB, ethernet and optional Wi-Fi, plus support for approved USB to LAN adaptors for second ethernet connection.



SECURITY

Safeguard data and ensure sensitive information remains secure

- The device boot process, firmware, and applications are verified on start up, and self repairs#
- Drive Lock and standard SSD encryption by default, for peace of mind over stored data. Initialize All Data/Settings feature allows admins to easily remove user data at decommissioning.
- Simplified management and security setting provides users and administrators with the ability to control security policies with ease. Class leading security support of TPM 2.0, TLS 1.3, HCD-PP, FIPS140-2 and SP800-193 compliant, as well as Security Information and Event Management (SIEM) support for real-time insights to potential threats.



SUSTAINABILITY


Support your environmental goals with MFDs that incorporate responsible design and efficient operations.

- Increased use of recycled plastic, lessening impact on the environment.
- Minimise waste with default print settings including 2-sided, and black and white options.
- A combination of Canon's On-Demand fixing technology and Sleep Recovery triggers minimises power consumption and helps with quick warm-up times while achieving low energy consumption.

ADVANCED SCANNING

uniFLOW Online's Filing Assist* saves you time, reduces keying errors and brings consistency to your filing so you can find what you need, when you need it, anywhere you have internet access; at home, work or on the go.

Filing Assist uses pre-configured workflows that scan batches of repetitive documents including invoices, delivery notes, picking lists and orders to popular cloud services. Not only are they scanned, they are named, converted and filed – based on rules and information from the document.

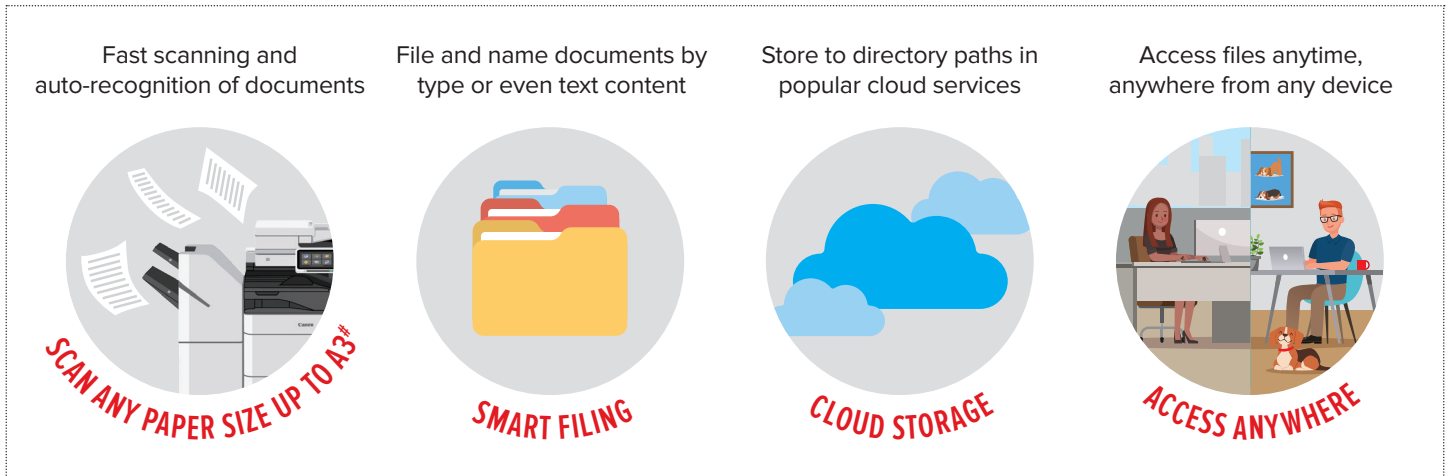

* Filing Assist is available with uniFLOW Online and requires a Cloud Image Processing subscription.

Maximum paper size depends on model of MFD.

CONFIGURATION

This flat configuration is for illustration purpose only.
For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).



imageRUNNER ADVANCE DX C359i Series Specifications

imageRUNNER
ADVANCE DX

Main Unit	
Machine Type	A4 Colour Laser Multifunctional
Core Function	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.8GHz Dual Core
Control Panel	10.1" TFT LCD WSVGA Colour Touch Panel
Memory	RAM 3.5GB
Storage	Standard: 256GB (SSD)
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T Optional: WiFi (IEEE 802.11b/g/n) Others: Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device) Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80 gsm)	Standard: 650 Sheets 100-sheets Multi-purpose Tray 550-sheets Paper Cassette x 1 Maximum: 2,300 Sheets (with Cassette Feeding Unit-AK1)
Paper Output Capacity (A4, 80gsm)	Standard: 250 Sheets Maximum: 500 Sheets (with Staple Finisher-Z1)
Finishing Capabilities	Standard: Collate, Group With Finisher: Collate, Group, Offset, Staple
Supported Media Types	Multi-purpose Tray: Thin, Plain, Heavy, Recycled, Colour, Transparency, Pre-punched, Bond, Label, Envelope Paper Cassette: Thin, Plain, Heavy, Recycled, Colour, Pre-punched, Bond, Envelope
Supported Media Sizes	Multi-purpose Tray: Standard Size: A4, A5, A5R, A6, B5 Custom Size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope Custom Size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Paper Cassette: Standard Size: A4, A5, A5R, A6, B5 Custom Size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5
Supported Media Weights [^]	Multi-purpose Tray: 60 to 220 gsm Cassettes: 60 to 163 gsm Duplex: 60 to 163 gsm [^] For details of supported media, refer to the 'Available Paper' in the User Manual
Warm-up Time	Quick Startup Mode: 4 seconds or less* * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Deep Sleep Mode: 10 Seconds or less From Power On: 10 Seconds or less* * Time from device power-on, until copy ready (not print reservation).
Dimensions (W x D x H)	Standard: 519 x 658 x 638 mm
Installation Space	Depends on configuration. Please refer to the online product configurator .
Weight	Approx. 49 kg (including toner)
Print Specifications	
Print Speed*	IR-ADV DX C359i: Up to 35ppm (A4), Up to 26 ppm (A5R), Up to 61 ppm (A5), Up to 23 ppm (A6) IR-ADV DX C259i: Up to 25ppm (A4), Up to 26 ppm (A5R), Up to 46 ppm (A5), Up to 23 ppm (A6) * 1-sided.
Print Resolution (dpi)	1,200 x 600
Page Description Languages	Standard: UFR II, PCL6, Adobe® PostScript® 3™
Direct Print	Supported File Types: TIFF, JPEG, PDF, EPS, and XPS
Printing from Mobile and Cloud	AirPrint®, Mopria™, Canon PRINT Business, uniFLOW Online and Universal Print. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T ⁴ (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts ² ¹ Optional PCL International Font Set-A1 is required. ² 1 Optional Barcode Printing Kit-D1 is required.
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, 2-sided Printing, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System	UFR II: Windows®10/ Windows®11/ Windows®Server2012/ Windows®Server2012 R2/ Windows®Server2016/ Windows®Server2019/ Windows®Server2022/ macOS® (10.13 or later) PCL: Windows®10/ Windows®11/ Windows®Server2012/ Windows®Server2012 R2/ Windows®Server2016/ Windows®Server2019/ Windows®Server2022 PS: Windows®10/ Windows®11/ Windows®Server2012/ Windows®Server2012 R2/ Windows®Server2016/ Windows®Server2019/ Windows®Server2022/ macOS® (10.13 or later) PPD: Windows® 10/11, macOS® (10.13 or later) As of Feb, 2023
Copy Specifications	
Copy Speed* (BW and CL)	IR-ADV DX C359i: Up to 35 ppm (A4), Up to 26 ppm (A5R), Up to 61 ppm (A5), Up to 23 ppm (A6) IR-ADV DX C259i: Up to 25 ppm (A4), Up to 26 ppm (A5R), Up to 46 ppm (A5), Up to 23 ppm (A6) * 1-sided.
First-Copy-Out Time (A4, BW/CL)	IR-ADV DX C359i: Approx. 5.1/6.9 seconds or less IR-ADV DX C259i: Approx. 6.9/9.4 seconds or less
Copy Resolution (dpi)	600 x 600, 300 x 600
Multiple Copies	Up to 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable Zoom: 25% to 400% (1% Increments) Preset Reduction/Enlargement: 25%, 50%, 70%, 81%, 86%, 100% (1:1), 115%, 122%, 141%, 200%, 400%
Copy Features	Preset R/E Ratios by Area, 2-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, 2-sided Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Colour Mode, Reserved Copy, Copy Sample
Scan Specifications	
Standard type	Single-pass Duplexing Automatic Document Feeder* (2-sided to 2-sided (Automatic)) * Detect Feeder Multi Sheet Feed is supported.
Document Feeder Paper Capacity (80 gsm)	Up to 100 Sheets
Acceptable Originals and Weights	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder Media Weight: 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) Note: Original of width narrows less than A6S except the business card: 50-128gsm LGL/52gsm: supported only feeding, Long Original(over than 355.6mm): 60-90gsm
Supported Media Sizes	Platen Max. Scanning Size: Up to 216.0 x 355.6 mm Document Feeder Media Size: A4, A5R, A6, B5 Custom Size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business Card: 48.0 x 85.0 mm to 55.0 x 91.0 mm
Scan Speed (ipm, BW and CL; A4)	Send (300 x 300 dpi): Automatic Colour Select "OFF": 1-sided Scanning: 95 2-sided Scanning: 190 Automatic Colour Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100 Copy: Scan Speed Priority (300 x 600 dpi): 1-sided Scanning: 50 2-sided Scanning: 100 Image Quality Priority (600 x 600 dpi): 1-sided Scanning: 30 2-sided Scanning: 50

Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Pull Scan Specifications	Colour Network ScanGear 2. For both TWAIN and WIA Supported OS: Windows®10 / Windows®11/ Windows®Server2012/ Windows®Server2012 R2 / Windows®Server2016 / Windows®Server2019 / Windows®Server2022 *As of Feb, 2023.
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Box, Scan to Network, Scan to USB Memory Key, Scan to Mobile Devices, Scan to Cloud (requires uniFLOW Online)
Send Specifications	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax
Address Book	LDAP (2,000)/Local (1,600)/Speed Dial (200)
Send Resolution (dpi)	Push: Up to 600 x 600 Pull: Up to 600 x 600
Communication Protocol	File: FTP (TCP/IP), SMB 3.1.1 (TCP/IP), WebDAV E-mail/Fax: SMTP, POP3
File Format	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply Policy, Optimise for Web, PDF A/1-b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, 2-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages
Fax Specifications	
Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	A4, A5*, A6*, B5*/A4, A5, B5 * Sent as A4.
FAX Memory	Up to 30,000 pages (2,000 Jobs)
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 Dials
Sequential Broadcast	Max. 256 Addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log
Store Specifications	
Mail Box (Number Supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 Jobs) Stored
Advanced Box	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 10/11 Concurrent Connections (Max.): SMB: 64, WebDAV: 3
Advanced Box Available Disc Space	Standard: 16 GB Approx.
Advanced Box Features	Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to Public, URI TX, Backup/Restore
Security Specifications	
Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print™), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) ¹ Requires uniFLOW Online/uniFLOW
Network Security	TLS 1.3, IPsec, IEEE802.1X Authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Box in the MFP, Scan and Send Virus Concerns for E-mail Reception
Device Security	Protecting SSD Data (SSD Data Encryption (FIPS140-2), SSD Data Overwrite Erase, SSD Lock), Standard SSD Initialise, Trusted Platform Module (TPM) v2.0, Job Log Conceal Function, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Common Criteria Certification (IEEE2600.2/HCD-PP)
Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
Environmental Specifications	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power Source	220-240 V, 50/60 Hz, 3.9 A
Power Consumption	Maximum: 1.5 kW Sleep Mode: Approx. 0.8 W ¹ ¹ 0.8 W Sleep mode is not available in all circumstances due to certain settings. Typical Electricity Consumption (TEC) ² : IR-ADV DX C359i: 0.33kWh, IR-ADV DX C259i: 0.22kWh ² As per USA Energy Star 3.0
Consumables	
Toner Cartridges	NP-76 Toner BK/C/M/Y
Toner (Estimated Yield @ 5% Coverage)	NP-76 Toner BK: 23,000 Pages NP-76 Toner C/M/Y: 18,000 Pages
Software and Printer Management	
Tracking and Reporting	Universal Login Manager (ULM) uniFLOW Online Express
Remote Management Tools	eMaintenance Content Delivery System
Scanning Software	Color Network ScanGear 2
Optimisation Tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)

Paper Supply Options

Cassette Module-AE1	Paper Capacity: 550 Sheets (80 gsm) Paper Type: Thin, Plain, Heavy, Recycled, Colour, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom Size: 98.0 x 190.5 to 216.0 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 159 mm (attached to the main unit) Weight: Approx. 10 kg
Cassette Module-AJ1	Paper Capacity: 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Heavy, Color, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom size: 98.0 x 190.5 mm to 216.0 to 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 425 mm (attached to the main unit) Weight: Approx. 16 kg
Cassette Feeding Unit-AK1	Paper Capacity: 550 Sheets (80 gsm) x 3 cassettes Paper Type: Thin, Plain, Recycled, Heavy, Colour, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom Size: 98.0 x 190.5 mm to 216.0 to 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 425 mm (attached to the main unit) Weight: Approx. 19 kg

Output Options*

* Paper capacity may vary with different paper type/size.

Staple Finisher-Z1	Tray Capacity (with 80 gsm paper/same paper type): A4, A5, A5R, A6, B5: 500 sheets Paper Weight: 60 to 220 gsm Staple Position: Corner Staple Capacity: A4, B5: 30 sheets (60 to 105 gsm) Power Source: From the Main Unit Dimensions (W x D x H): 555 x 459 x 301 mm (Unit size) Weight: Approx. 14 kg
--------------------	---

System and Controller Options

Print Accessories	PCL International Font Set-A1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Wireless LAN Board-D1, Copy Control Interface Kit-A1, Serial Interface Kit-K3
FAX Accessories	Super G3 FAX Board-BL1, Remote Fax Kit-A1, IP Fax Expansion Kit-B1

Other Options

Accessibility Accessories	ADF Access Handle-A1
Staple Cartridge	Staple-P1



Canon Australia Pty Ltd
1800 444 199
canon.com.au/business
Canon New Zealand Ltd
0800 222 666
canon.co.nz/business